

FIG. 1


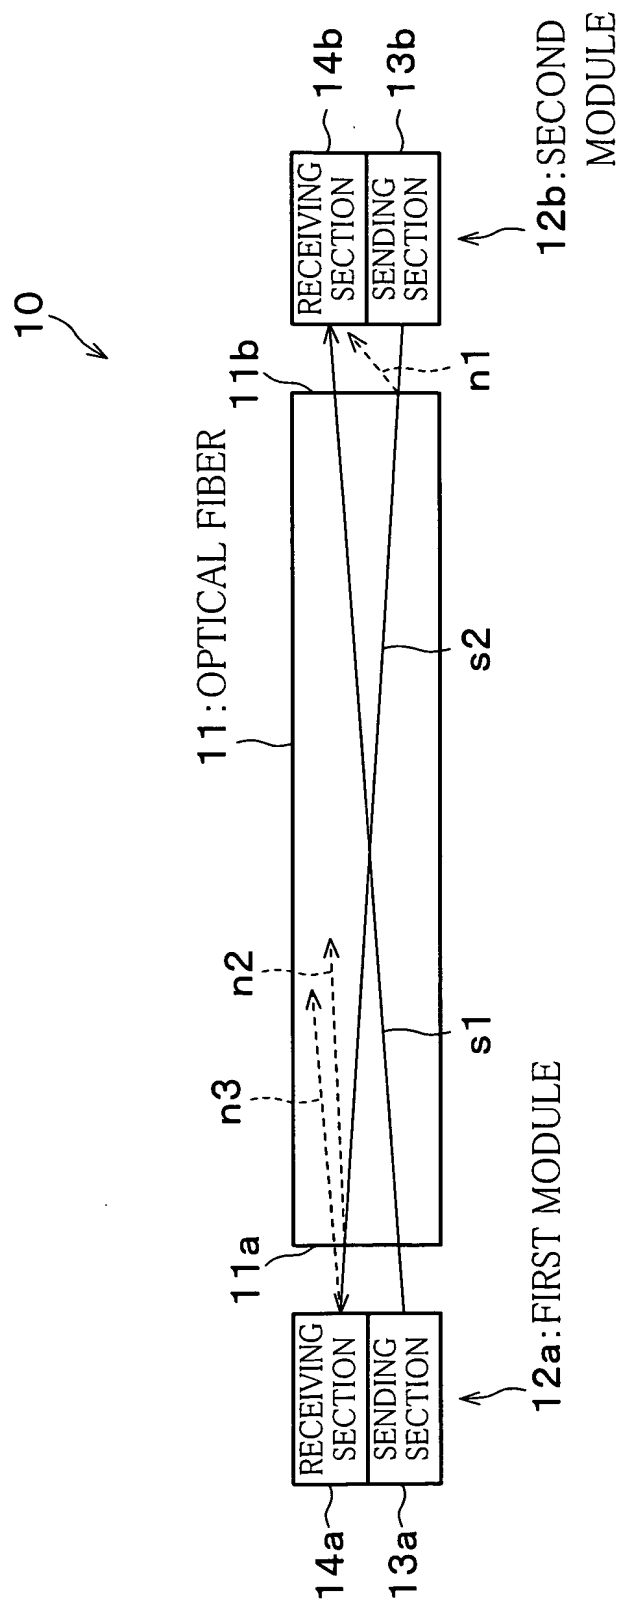


FIG. 2

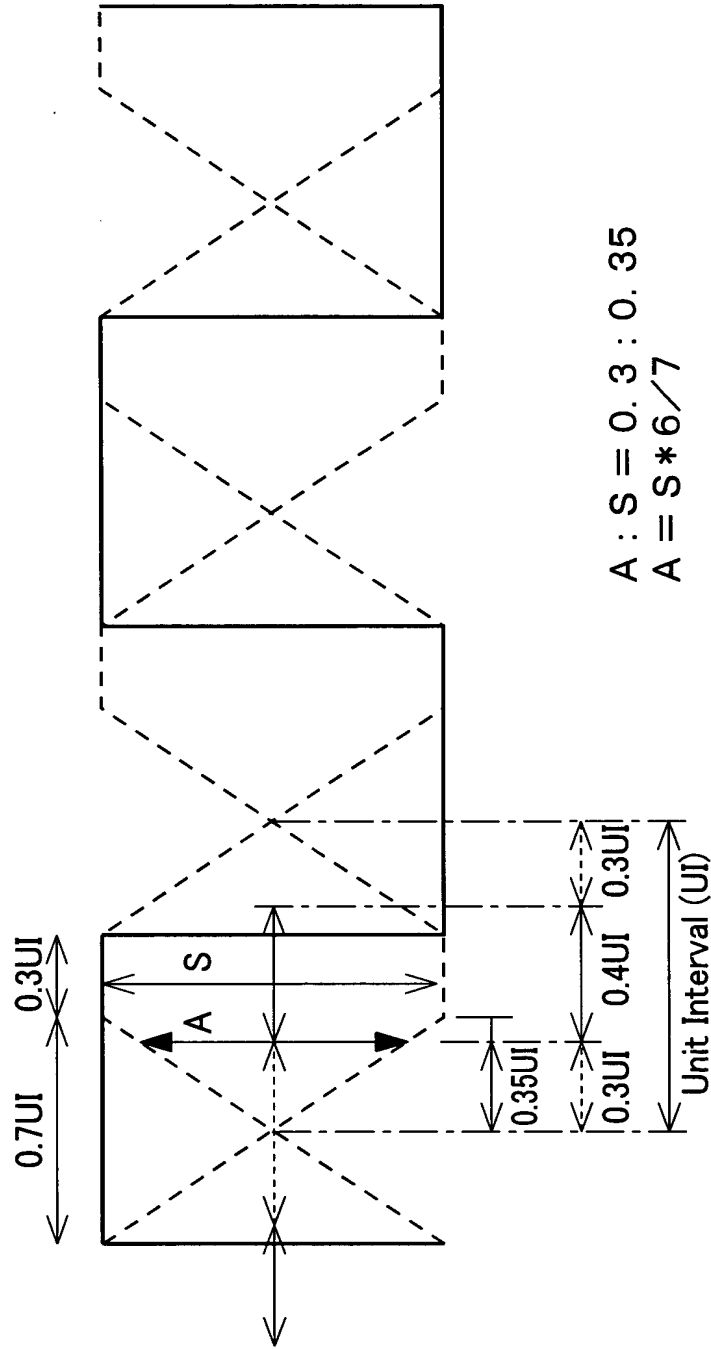


↔ EYE OPENING REQUIRED $0.4UI$

↔ ACCEPTABLE JITTER PORTION $0.6UI$

↑↓ SIGNAL AMPLITUDE "A" THAT MUST BE ENSURED AT MINIMUM

3/10

FIG. 3

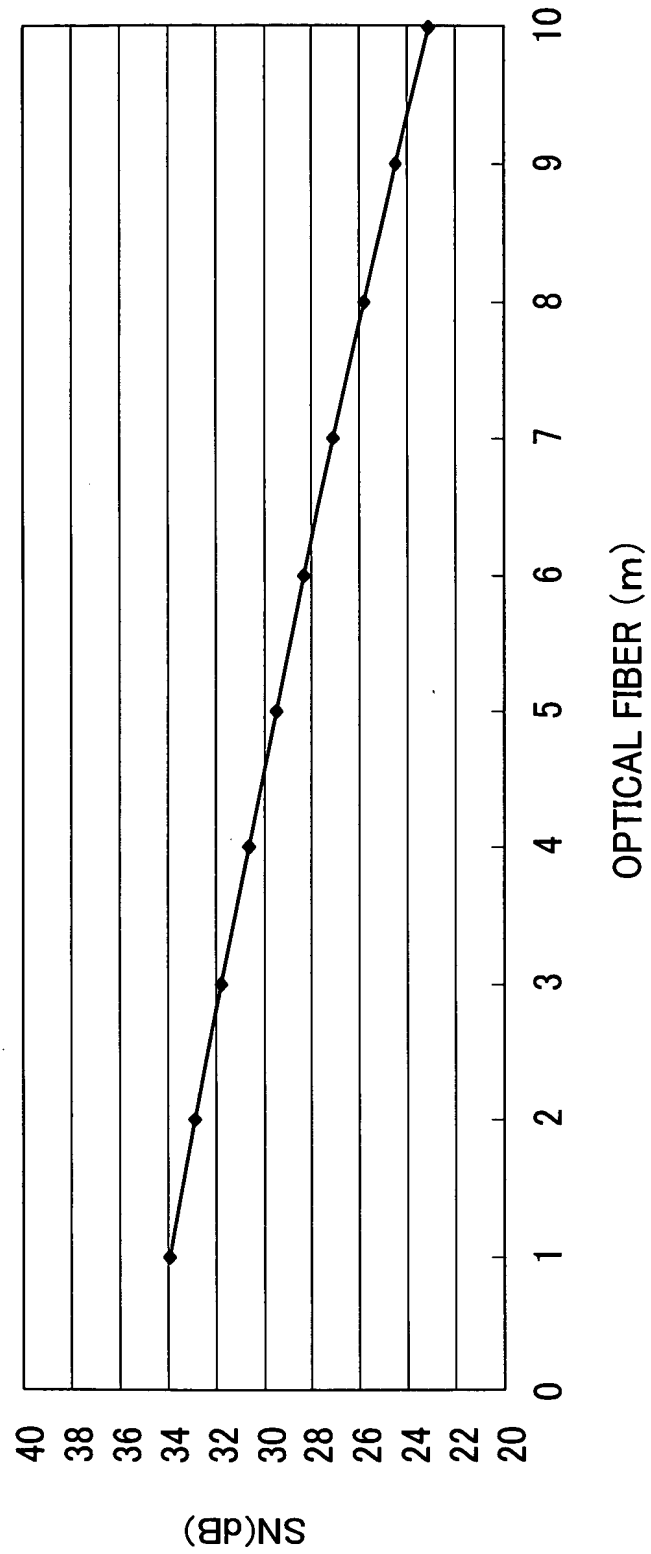

4/10

FIG. 4

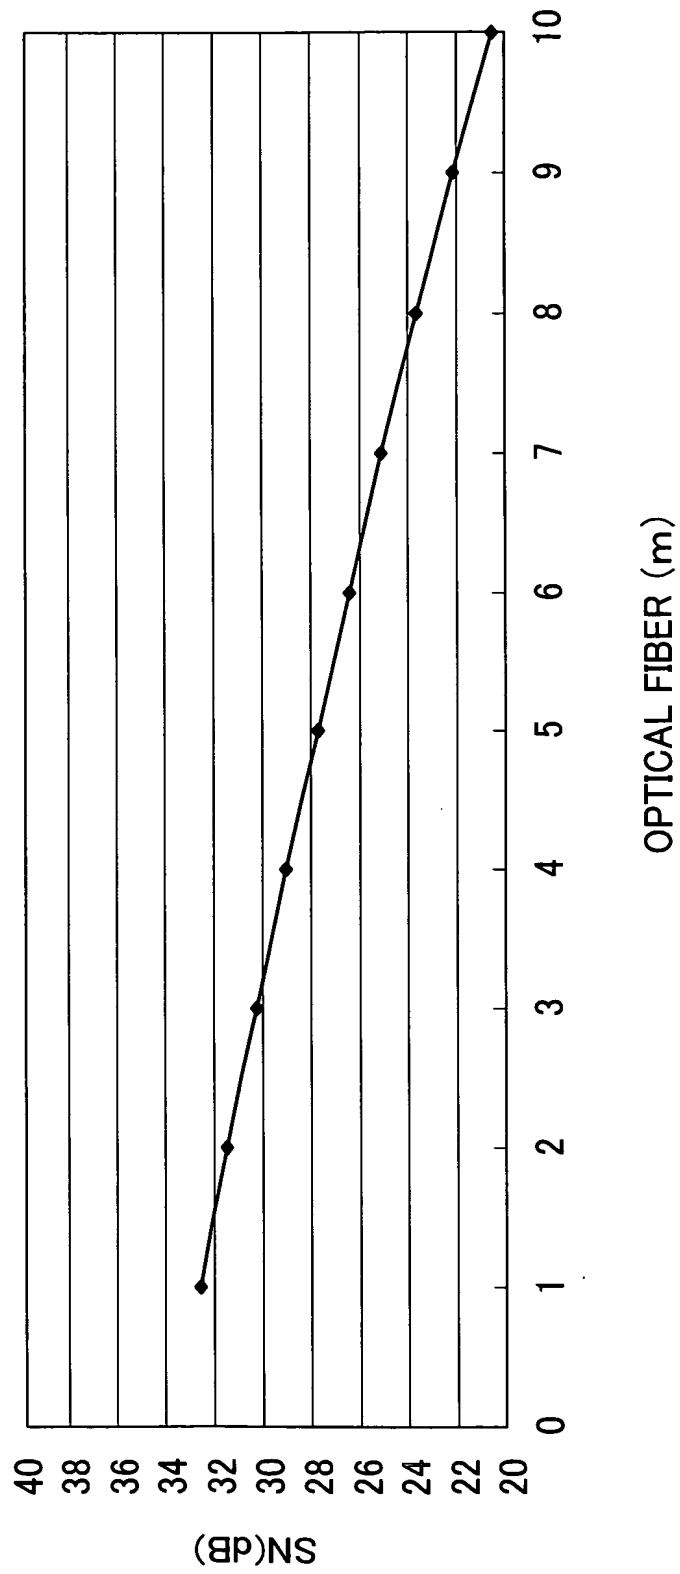


FIG. 5

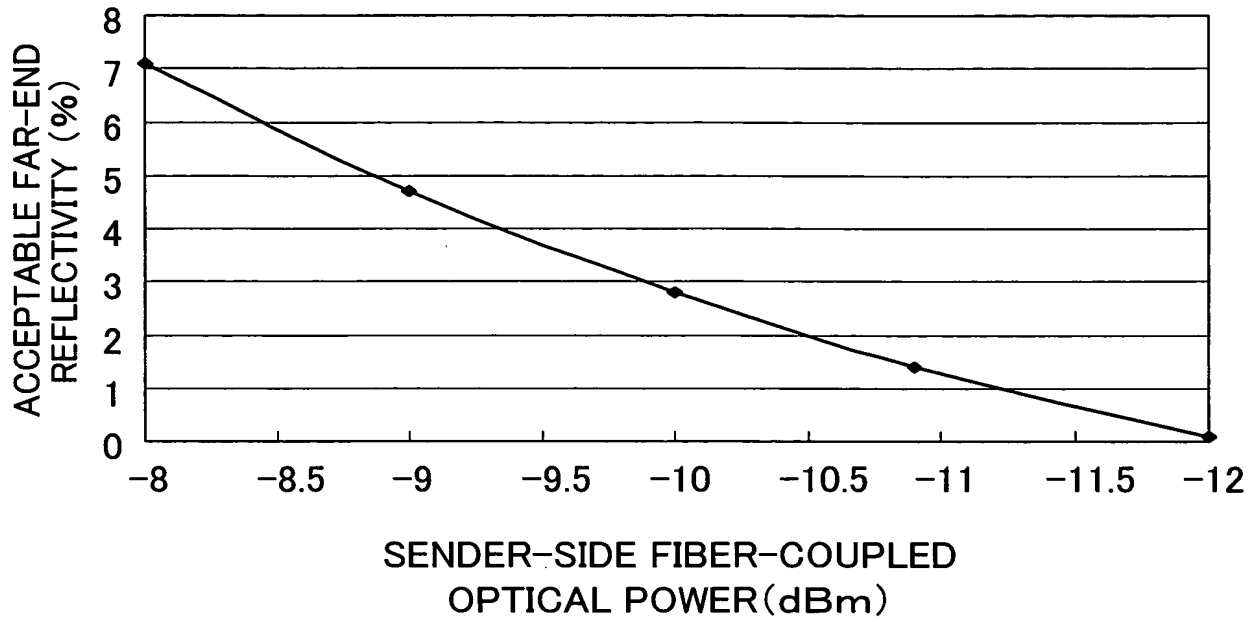


FIG. 6

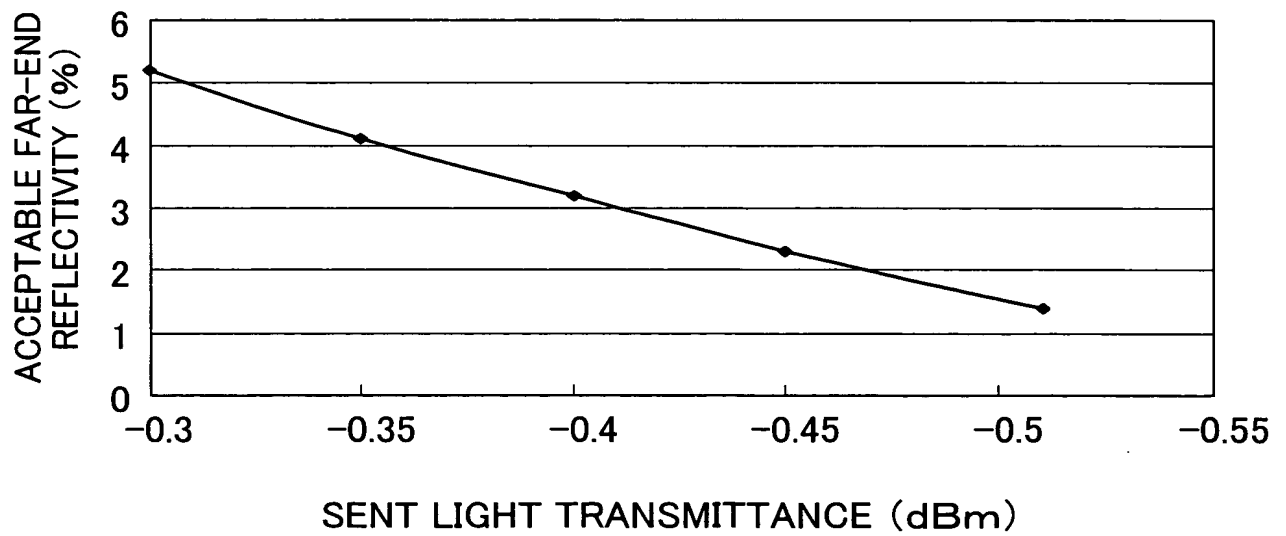


FIG. 7

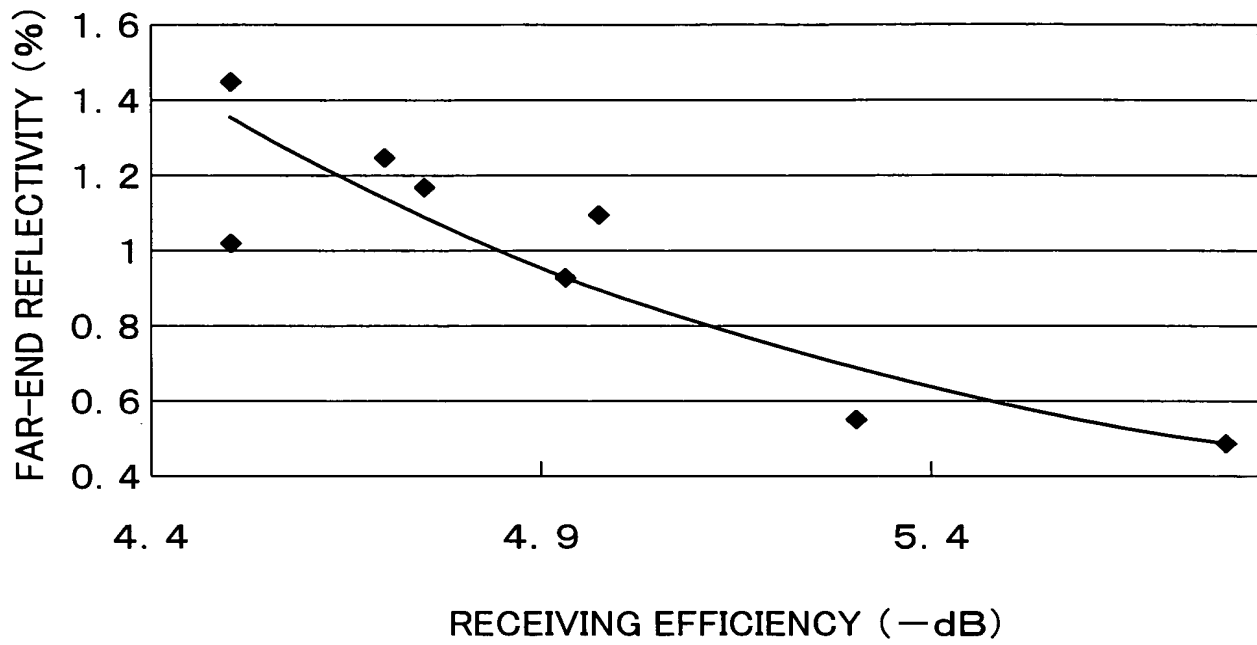


FIG. 8 (b)

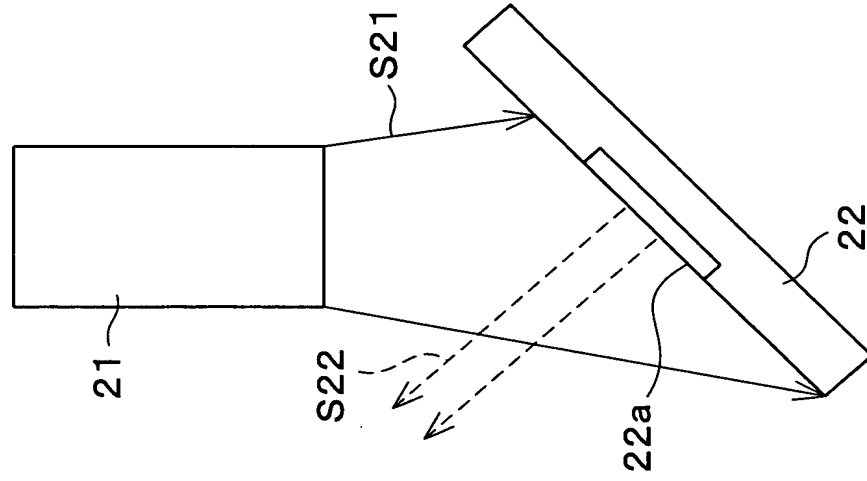


FIG. 8 (a)

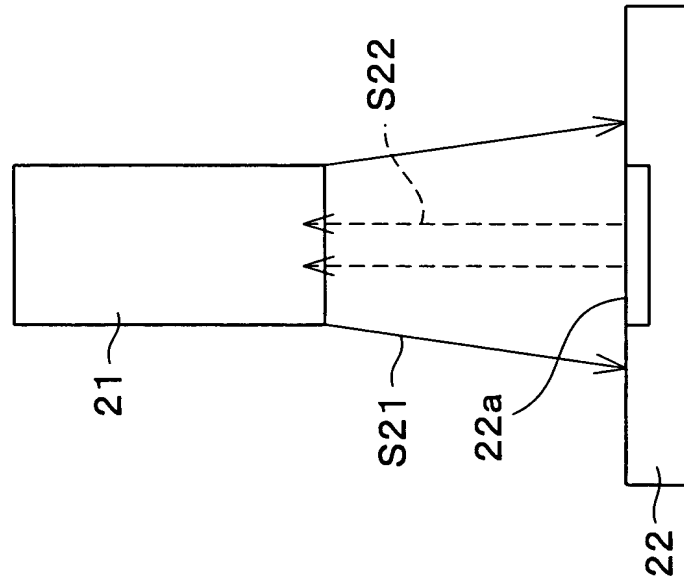


FIG. 9 (a)

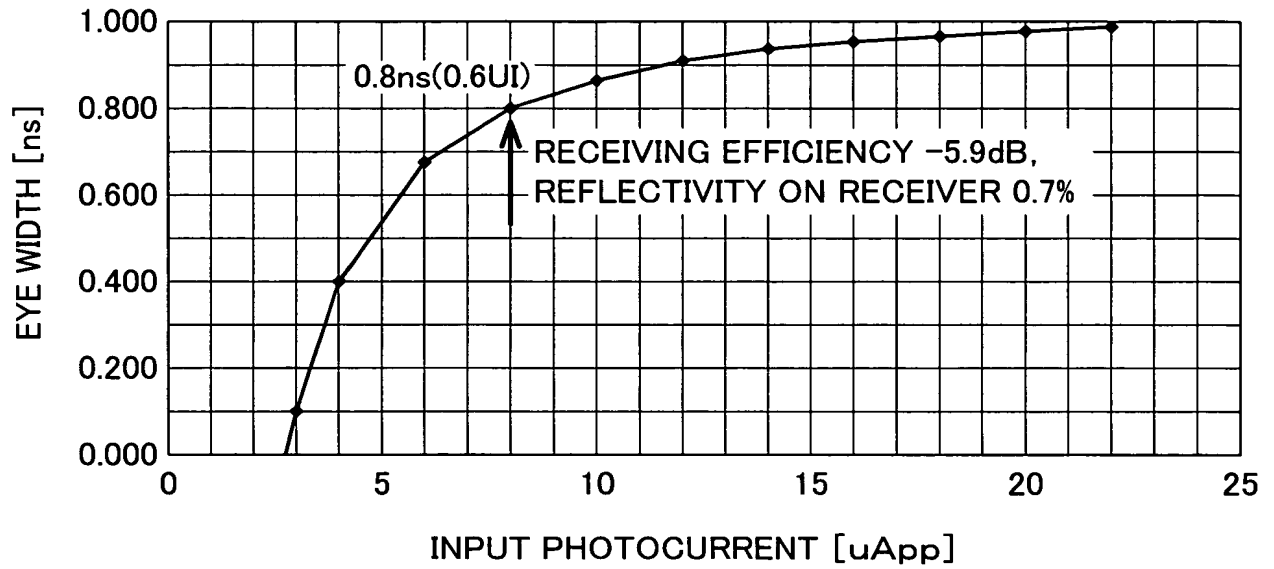


FIG. 9 (b)

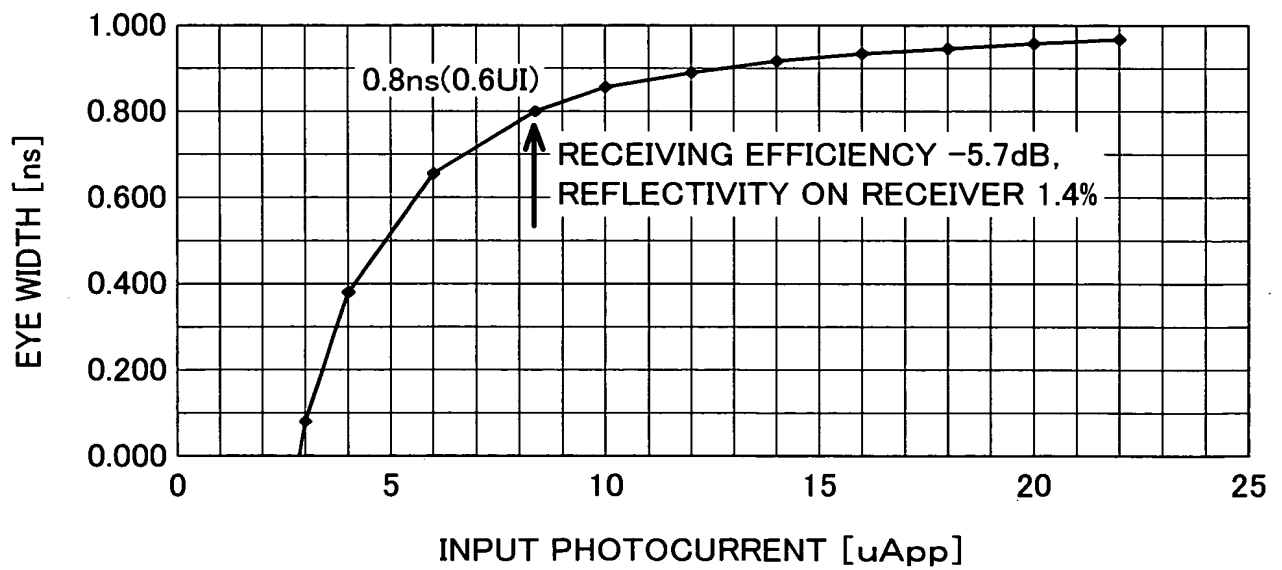


FIG. 10

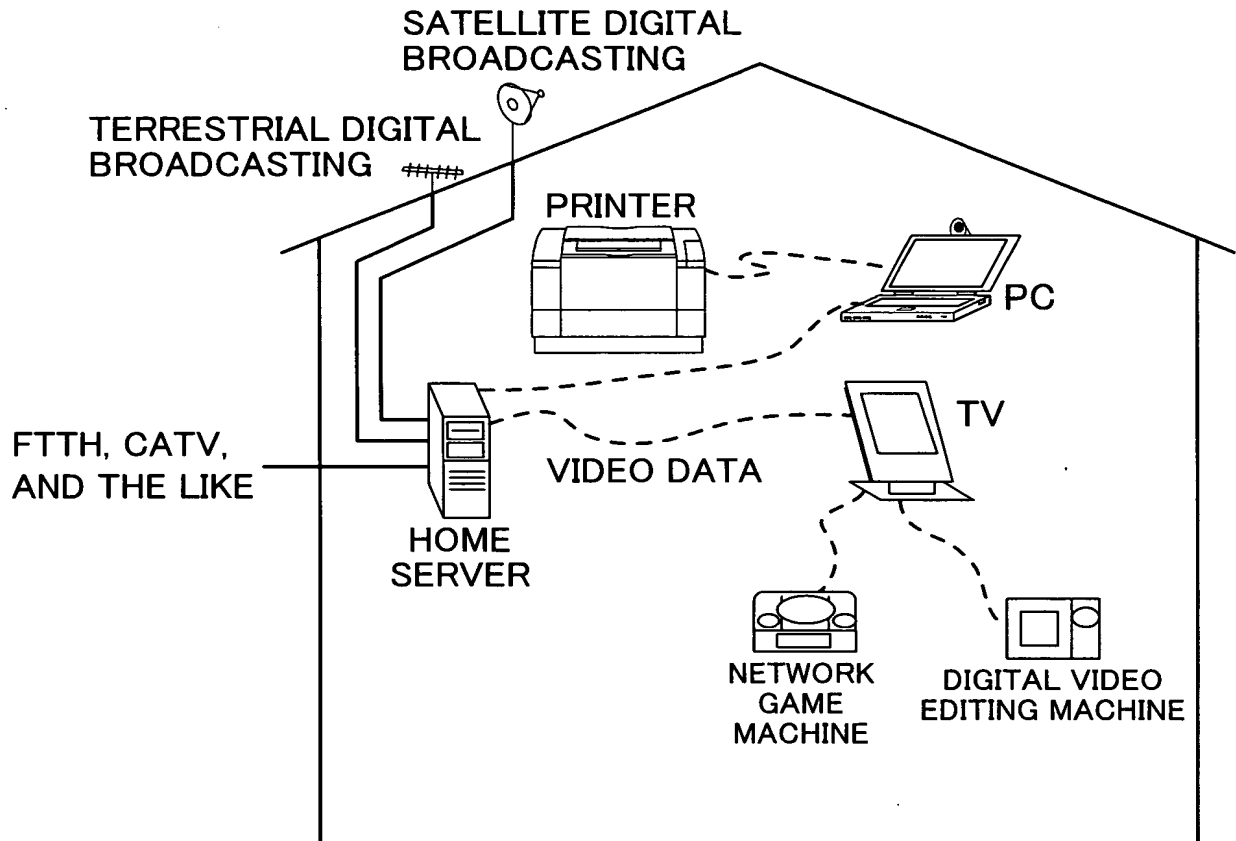


FIG. 11

